


# AIR LINE COMBINATION UNITS

## MIDI SERIES SERVICE :- AIR



Once you have selected the filter, regulator and lubricator which meets your requirement save assembly time and cost by ordering them in the form of a factory assembled combination unit.

### Ordering References

Sizes	Combination of	Models	CONSISTS OF		
			Filter/FR (Comb.)	Regulator	Lubricator
G1/4	FRL	Poly. C13-023	F10-02	R13-023	L10-02
		Metal C12-023	F11-02	R13-023	L11-02
	FR+L	Poly. BL13-023	B13-023	-	L10-02
		Metal BL12-023	B12-023	-	L11-02
	F+L	Poly. FL13-02	F10-02	-	L10-02
		Metal FL12-02	F11-02	-	L11-02
G3/8	FRL	Poly. C13-033	F10-03	R13-033	L10-03
		Metal C12-033	F11-03	R13-033	L11-03
	FR+L	Poly. BL13-033	B13-033	-	L10-03
		Metal BL12-033	B12-033	-	L11-03
	F+L	Poly. FL13-03	F10-03	-	L10-03
		Metal FL12-03	F11-03	-	L11-03
G1/2	FRL	Poly. C13-043	F10-04	R13-043	L10-04
		Metal C12-043	F11-04	R13-043	L11-04
	FR+L	Poly. BL13-043	B13-043	-	L10-04
		Metal BL12-043	B12-043	-	L11-04
	F+L	Poly. FL13-04	F10-04	-	L10-04
		Metal FL12-04	F11-04	-	L11-04


### Reduced Pressure Range

Available in four reduced pressure range : suffix

1. For 0 - 2 kg/cm<sup>2</sup>
2. For 0 - 4 kg/cm<sup>2</sup>
- \* 3. For 0 - 9 kg/cm<sup>2</sup>
4. For 0 - 15 kg/cm<sup>2</sup>

\* Unless otherwise specified. 0-9 Kg/cm<sup>2</sup> (0-125 PSI) will be supplied.

### Model Ordering Code Instruction

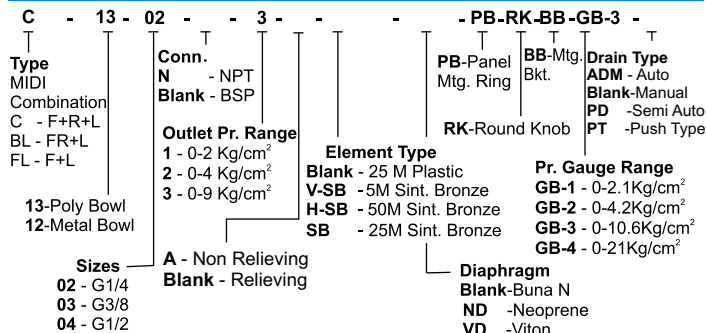

Consult factory for options & accessories.

## Compressed Air Accessories

# Shah Pneumatics

Regd. Office : 28-30, Navketan Industrial Estate,  
Mahakali Caves Road, Andheri (East),  
Mumbai - 400 093, INDIA.  
Phone : +91-22-6695 1090, 2687 5314 Fax: +91-22-2687 5317  
E-mail : shahpneu@bom3.vsnl.net.in  
Website : www.shah-pneumatics.com

# Airmatic



### Condition of use

	Polycarbonate Bowl	Metal Bowl
Max. Supply Pressure	12 Kg/cm <sup>2</sup>	18 Kg/cm <sup>2</sup>
Max. Op. Temp.	50°C	70°C

### Accessories & Options

		SUFFIX
Filter Element	5µ Sintered Bronze	V-SB
	50µ Sintered Bronze	H-SB
	25µ Sintered Bronze	SB
Panel Mounting Ring		PB
Mounting Bracket		BB
Non Relieving Regulator		A
Round Knob		RK
Automatic Drain Assy.	Poly.	ADM
	Metal	ADM
Pressure Gauge 55mm Dial G1/4 Back Connection	Range 0 to 2.1 Kg/cm <sup>2</sup>	GB-1
	0 to 4.2 Kg/cm <sup>2</sup>	GB-2
	0 to 10.6 Kg/cm <sup>2</sup>	GB-3
	0 to 21 Kg/cm <sup>2</sup>	GB-4

### Dimensions & Weights

Unit	A mm	B mm	C mm	Wt. in Kgs. Poly. Bowl
FRL	206	265	129	1.800
FL	135	173	129	1.130
FR+L	133	265	129	1.410

